

# PRODUCT DATA SHEET 20 SERIES

web: <https://stairnosingaustralia.com.au>



Contact : Daphne 0422 803 365

email: [daphne@stairnosingaustralia.com.au](mailto:daphne@stairnosingaustralia.com.au)



**STAIRNOSING 20 series stair nosing is suitable for rebating-recessing**

Sometimes a nosing is required that can be recessed. A builder or architect chooses a recessed safety stair tread nosings that is minimalist in design. Because the stair nosing is narrow therefore doesn't look industrial.




## SPECIFICATIONS

CODE	<b>20 series</b>
BASE MATERIAL	Alloy: 6060, Temper: T5
FINISH	Clear Anodised – 25Um
TREAD WIDTH	55mm
FRONT DEPTH	10mm
TREAD THICKNESS	2.5mm
INSERT TYPE	Carborundum – Heavy Duty, External Grade
PRODUCT WARRANTY	2 Years Supply Only - 3-5 years as per SNA Installation warranty
INSERT SLIP RATING	P5 Classification (Highest available)
CODE COMPLIANCE	AS1428.1-2009 Check floor finish colour for luminance contrast requirements
FIXING METHOD	Fixed with adhesive
APPLICATION	Surface mounted or recessed into hard floor finishes – Concrete, Timber etc.

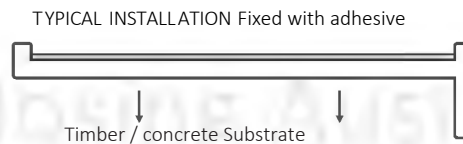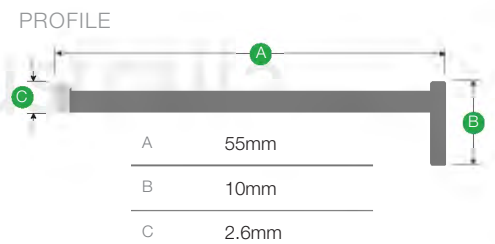

[Read more...](#)



720SG



720C



720B



420CY



420BG



420CB



420CG



420BB



420BY