

# PRODUCT DATA SHEET CERAMIC PLAIN TILE PAVERS- DIRECTIONAL

**web: [https:// stairnosingaustralia.com.au](https://stairnosingaustralia.com.au)**

**Contact : Daphne 0422 803 36**

**email: [daphne@stairnosingaustralia.com.au](mailto:daphne@stairnosingaustralia.com.au)**

## CERAMIC PLAIN TILE PAVERS - DIRECTIONAL

Tactiles series are designed to be installed onto pedestrian surfaces to assist in the orientation of people who are vision impaired and to give tactile warning to safely navigate around in a built environment - detectable underfoot or by cane.

### SPECIFICATIONS

PRODUCT	<b>Ceramic Plain Tile Directional</b>
CODE	<b>NCTD</b>
MATERIAL	Ceramic
TOP PROFILE	Directional bars
OVERALL DIMENSIONS	300 x 300mm
PLATE THICKNESS	8mm
PRODUCT WARRANTY	3 years (As per Standard Warranty)
SLIP RATING	V Rating
CODE COMPLIANCE	AS/NZS1428.4.1:2009, BCA 2014 (Subject to surrounding floor finish luminance)
FIXING METHOD	Adhesive or Mechanical

### STANDARD COLOURS



CHARCOAL NCTD4015

Dry: 8.05    Wet: 5.76



GREY NCTD4016

Dry: 33.43    Wet: 32.56



MUSTARD NCTD4017




WHITE NCTD4018

Dry: 86.7    Wet: 87

\*Other colours available on request



### PROFILE



A    300mm

B    8mm


\* Length is 300mm

Requires a 30% contrast

LRV [Light Reflective Values ]  
Luminance Contrast, values must be tested against adjacent surfaces for compliance with Australian Standards

### TYPICAL INSTALLATION

Fix with adhesive or mechanical

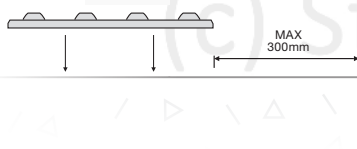

Concrete Substrate

