

PRODUCT DATA SHEET STAINLESS STEEL PIN BACK STUD - RINGS ON SIDE

web: [https:// stairnosingaustralia.com.au](https://stairnosingaustralia.com.au)

Contact : Daphne 0422 803 36

email: daphne@stairnosingaustralia.com.au


STAINLESS STEEL STUDS

Tactiles series are designed to be installed onto pedestrian surfaces to assist in the orientation of people who are vision impaired and to give tactile warning to safely navigate around in a built environment - detectable underfoot or by cane.

SPECIFICATIONS

| | |
|--------------------|--|
| PRODUCT | Stainless Steel Tactile Stud |
| CODE | NSSS12 |
| MATERIAL | Solid 316 Stainless Steel |
| TOP PROFILE | Concentric rings, rings on side |
| OVERALL DIMENSIONS | 6mm (Ø) x 20mm (L) |
| PRODUCT WARRANTY | 5 years (As per Standard Warranty) |
| SLIP RATING | R11 |
| CODE COMPLIANCE | AS/NZS1428.4.1:2009, BCA 2014 (Subject to surrounding floor finish luminance) |
| FIXING METHOD | Adhesive or Mechanical |

PROFILE



| | |
|---|------|
| A | 35mm |
| B | 5mm |
| C | 15mm |
| D | 6mm |



Discrete Required Contrast-45%

STANDARD COLOURS

Finish




STAINLESS STEEL

LRV: Dry 50.136 Wet: 41.843

TYPICAL INSTALLATION

Fix with adhesive or mechanical

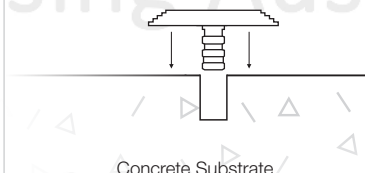

LRV [Light Reflective Values]
Luminance Contrast, values must be tested against adjacent surfaces for compliance with Australian Standards

