

PRODUCT DATA SHEET POLY DIRECTIONAL TILE

web: <https://stairnosingaustralia.com.au>

Contact : Daphne 0422 803 36

email: daphne@stairnosingaustralia.com.au

POLY TILE - DIRECTIONAL

Tactiles series are designed to be installed onto pedestrian surfaces to assist in the orientation of people who are vision impaired and to give tactile warning to safely navigate around in a built environment - detectable underfoot or by cane.

SPECIFICATIONS

PRODUCT	Poly tile Directional
CODE	NRTD
MATERIAL	High Impact Thermoprene (Poly)
TOP PROFILE	Directional bars
OVERALL DIMENSIONS	300 x 300mm
PLATE THICKNESS	2.6mm with bevelled edges
PRODUCT WARRANTY	3 years (As per Standard Warranty)
SLIP RATING	V Rating
CODE COMPLIANCE	AS/NZS1428.4.1:2009, BCA 2014 (Subject to surrounding floor finish Luminance)
FIXING METHOD	Heavy duty external grade butyl tape with reinforcement mesh
FEATURE	Adhesive back for peel-n-stick fast application (Shown in profile)



PROFILE



A 300mm

B 2.6mm


* Length is 300mm

STANDARD COLOURS



TYPICAL INSTALLATION

Fix with adhesive

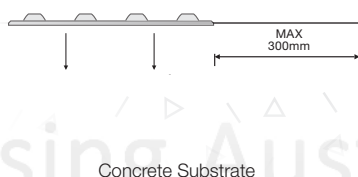

Directional tile Required Contrast-30%

LRV [Light Reflective Values]
Luminance Contrast, values must be tested against adjacent surfaces for compliance with Australian Standards



* For porous surfaces primer may be required