

# PRODUCT DATA SHEET 15 SERIES





**web: <https://stairnosingaustralia.com.au/>**

**Contact : Daphne 0422 803 365**


**email: [daphne@stairnosingaustralia.com.au](mailto:daphne@stairnosingaustralia.com.au)**

**STAIRNOSING 15 series-stair nosing is suitable for all surfaces**

With a very wide tread this provides maximum stability on steps edges. Often steps require a wider tread because they are chipped or cracked, or even bull nosed. Older sets of stairs may have a grooved tile or the concrete may be grooved on the step edge. Any remedial repairs require a nosing that will cover the width of those grooves. This product with its wide tread is designed to do that. Suitable for bricks, paver's, all outdoor steps-stairs

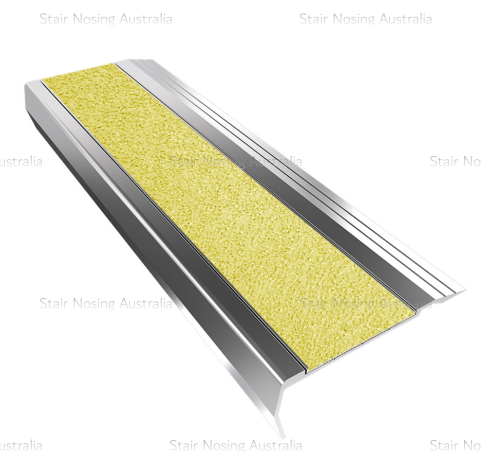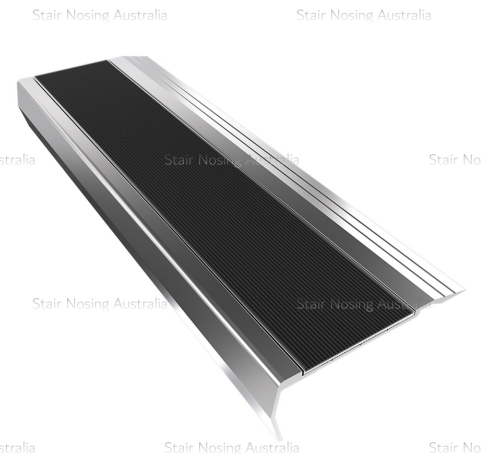

PRODUCT	<b>15 series</b>
	Alloy: 6060, Temper: T5
FINISH	Clear Anodised – 25Um/Anodised Black/Anodised Sovereign Gold
TREAD WIDTH	98 mm
FRONT DEPTH	35 mm
TREAD THICKNESS	4.8mm
INSERT TYPE	Carborundum - Epoxy - Santoprene rubber and Aluminum ripple trim
PRODUCT WARRANTY	2 Years (As per Stair Nosing Perth's standard warranty conditions)
INSERT SLIP RATING	P4 classification for rubber and aluminum ripple trim and P5 classification (Highest available) for carborundum and epoxy
CODE COMPLIANCE	AS1428.1-2021 Check floor finish colour for luminance contrast requirements LRV values
FIXING METHOD	Screw fixed/or adhesive
APPLICATION	Surface mounted on hard floor finishes – Concrete [ if level] , Timber, porcelain, ceramics, terrazzo, bricks, paver's.



715 Anodised ripple trim


**Inserts for 15 series**



415 Carborundum



115 Epoxy carbide

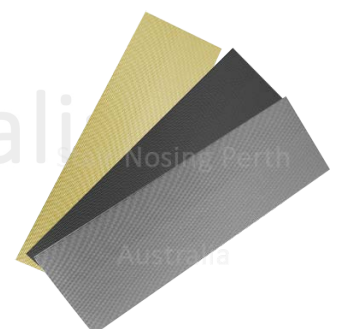

315 Santoprene Rubber