

Contact: Daphne 0422 803 365
email: daphne@stairnosingaustralia.com.au




STAIRNOSING 18 series-designed for thick flooring finishes

Stair Nosing Perth offer a comprehensive range of architecturally designed profiles to meet every demand, from heavy duty traffic in railway stations to the more general retail/office use, providing maximum pedestrian safety and WHS requirements.

This stair nosing is has generous rebates at the back and front to allow for thick flooring finishes.

This includes rubber, hardwood flooring, rubber backed vinyl plank, and any flooring acoustic flooring flooring finishes.


Additionally with its 10 mm face it complies with AS 1428 2009 standards

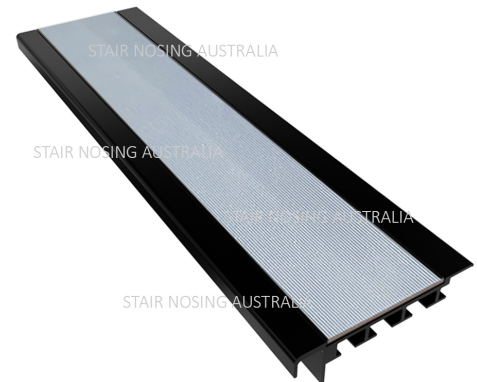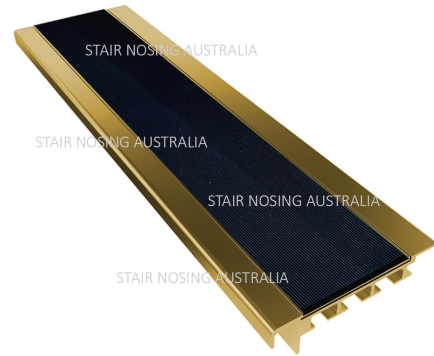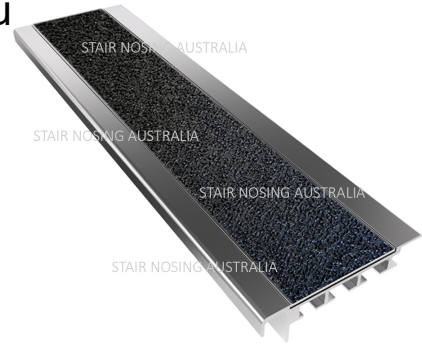

SPECIFICATIONS

PRODUCT	18 series
BASE MATERIAL	Alloy: 6060, Temper: T5
FINISH	Clear Anodised – 25Um/Anodised Black/Anodised Sovereign Gold
TREAD WIDTH	82 mm
FRONT DEPTH	10 mm
TREAD THICKNESS	4.8mm
INSERT TYPE	Carborundum - Epoxy - Santoprene Rubber Aluminum Ripple trim
PRODUCT WARRANTY	2 Years (As per Stair Nosing Perth's standard warranty conditions)
INSERT SLIP RATING	P4 classification for serrated rubber and aluminum ripple trim and P5 classification for carborundum and epoxy.
CODE COMPLIANCE	(Highest available)
FIXING METHOD	AS1428.1-2021
APPLICATION	Check floor finish colour for luminance contrast requirements and LRV [Light Reflective Values] Screw fixed/or adhesive Surface mounted on hard floor finishes- such as vinyl, rubber, acoustic flooring and drilled plugged and screwed with carpet


Inserts for 18 series




718 Anodised ripple trim P4



418 Carborundum P5



118 Epoxy carbide P5



318 Santoprene Rubber P4



TYPICAL INSTALLATION

Screw fixed

