

PRODUCT DATA SHEET 20 SERIES



web: <https://stairnosingaustralia.com.au>

Contact : Daphne 0422 803 365

email: daphne@stairnosingaustralia.com.au

STAIRNOSING 20 -stair nosing is suitable for surface mounting




This nosing is very popular as it has a minimalist style. The narrow tread is AS1428 compliant and does not look too commercial or industrial.

It can be installed on ANY level hard surface.

SPECIFICATIONS

CODE	20
BASE MATERIAL	Alloy: 6060, Temper: T5
FINISH	Clear Anodised – 25Um
TREAD WIDTH	55mm
FRONT DEPTH	10mm
TREAD THICKNESS	2.6mm
INSERT TYPE	Carborundum, aluminium ripple trim-
PRODUCT WARRANTY	2 Years standard manufacturers warranty
INSERT SLIP RATING	P5 Classification (Highest available carborundum) P4 aluminum ripple trim
CODE COMPLIANCE	AS1428.1-2021 Check floor finish colour for luminance contrast requirements
FIXING METHOD	Fixed with adhesive
APPLICATION	Surface mounted or recessed into hard floor finishes – Concrete, Timber etc.

PROFILE

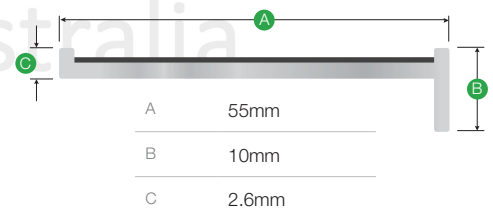

TYPICAL INSTALLATION Fixed with adhesive

