

PRODUCT DATA SHEET 22 SERIES

web: [https:// stairnosingaustralia.com.au](https://stairnosingaustralia.com.au)

Contact : Daphne 0422 803 365

email: daphne@stairnosingaustralia.com.au




Stair Nosing Australia offers a comprehensive range of architecturally designed profiles to meet every demand, from heavy duty traffic in railway stations to the more general retail/office use, providing maximum pedestrian safety and WHS requirements. Our stair nosings are manufactured to meet and exceed the Australian standards and building codes.

This stair nosing offers high P5 slip resistance, the maximum available, with a photo luminescent glow in the dark insert on the step edge.


As the insert is a separate 2.5 mm thick piece of aluminum, it offers additional strength and unlike tape will not peel off.

SPECIFICATIONS

CODE	422
BASE MATERIAL	Alloy: 6060, Temper: T5
FINISH	Clear Anodised – 25Um
TREAD WIDTH	80mm
FRONT DEPTH	10mm
TREAD THICKNESS	4.8mm
INSERT TYPE	54mm Insert: Carborundum - Heavy Duty 10mm Insert: Epoxy Based Luminescent Carb
PRODUCT WARRANTY	2 year standard manufacturers warranty
INSERT SLIP RATING	P5 Classification (Highest available)
CODE COMPLIANCE	AS1428.1-2021 Check floor finish colour for luminance contrast requirements
FIXING METHOD	Adhesive and Screw fixed
APPLICATION	Surface mounted on hard floor finishes – Concrete, Timber etc.

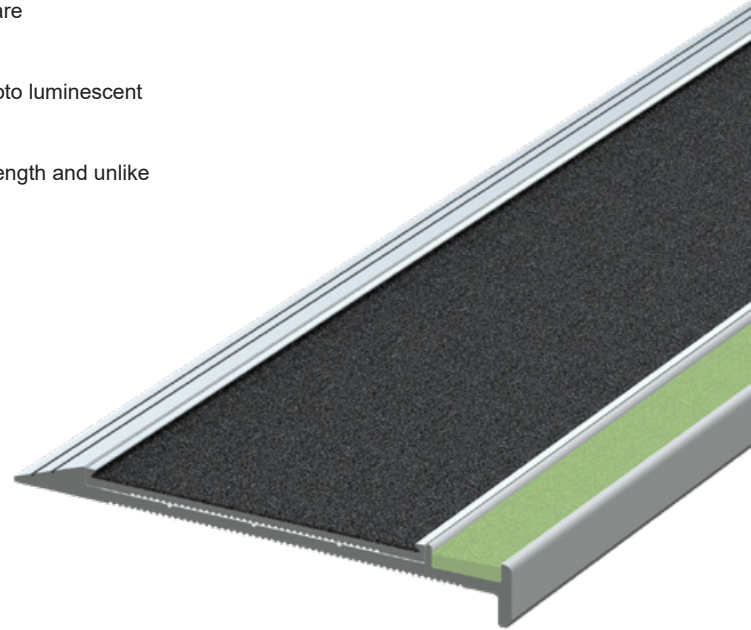

PROFILE

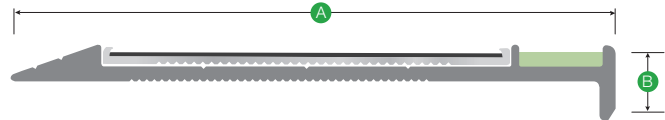

A 80mm

B 10mm

* Insert measures 54mm wide

*STANDARD COLOURS

Aluminium



CLEAR ANODISED



BLACK ANODISED



GOLD ANODISED

Insert



SAFETY YELLOW



BLACK



LUMINESCENT



RED




GREY

*Other colours available on request

TYPICAL INSTALLATION

Screw fixed/adhesive fix



Hard Finish Substrate