

# PRODUCT DATA SHEET 13C SERIES

web: <https://stairnosingaustralia.com.au>



Contact : Daphne 0422 803 365

email: [daphne@stairnosingaustralia.com.au](mailto:daphne@stairnosingaustralia.com.au)

Recessed stair nosing inlay features clear anodised aluminum matched with a high-grade carborundum insert.

Designed to comply with AS-1428.1 2021, it features high grade aluminum construction with a carborundum insert.


A P5 slip rating from a NATA approved laboratory, tested to AS 4586

The clear alloy is available with Black, Yellow, Grey and White inserts to provide designer options, as well as providing a solution for various colour and types of substrates – enabling compliance with the 30% colour contrast required under the standard.

This nosing inlay type is recess mounted, suitable for indoor or outdoor applications.



BASE MATERIAL	Alloy: 6060, Temper: T5
FINISH	Clear Anodised – 25Um
TREAD WIDTH	55mm
TREAD THICKNESS	10 mm
INSERT TYPE	Epoxy
PRODUCT WARRANTY	(2 years As per Stair Nosing Australia's standard warranty conditions)
INSERT SLIP RATING	P5 classification
CODE COMPLIANCE	AS1428.8 2021 compliant Check floor finish colour for luminance contrast requirements
FIXING METHOD	<b>Adhesive Only</b>
APPLICATION	Rebated-recessed into wood concrete, hard surfaces

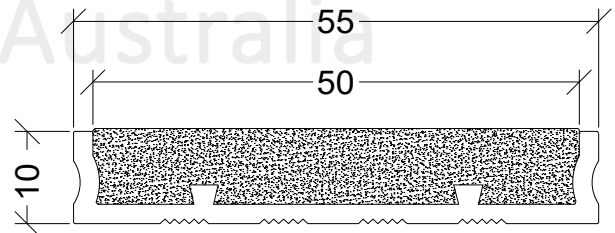

## CARBORUNDUM COLOUR VARIATIONS



0422 803 365

[daphne@stairnosingaustralia.com.au](mailto:daphne@stairnosingaustralia.com.au)

<https://stairnosingaustralia.com.au/>