



STAIR NOSING AUSTRALIA

[https:// stairnosingaustralia.com.au](https://stairnosingaustralia.com.au) Contact : Daphne 0422 803 365

email: daphne@stairnosingaustralia.com.au

Vinyl plank stair nosing is essential for protecting the edges of your steps, ensuring safety, and providing a clean finish to your staircase

Designed for vinyl plank flooring with generous rebates, to accommodate new hybrid flooring.

Key Selection Factors

* **Plank Thickness:** Carefully measure your vinyl plank's thickness and choose a stair nosing with a rebate that fits exactly. Most vinyl planks are 2.5mm, 3mm, 4.5mm, or 5mm thick, so select a nosing that hugs the edge without gaps or loose spots for a seamless and secure finish.

* **Slip Compliance:** Make sure you choose a stair nosing with at least a P5 slip-resistant tread if you need to meet safety rules for commercial or busy home stairs. This rating means the nosing gives you a solid grip, even if the steps get wet or dirty, helping prevent slips and falls.

Product: 700 series

Product: 717

Description : Stair Nosing Australia 717

BASE MATERIAL	Alloy 6060, Temper: T5
FINISH	Clear Anodised – 25Um
INSERT TYPE	Anodised Alloy: 6060, Temper: T5
WARRANTY	2 Years (As per Walway's Standard)
SLIP RATING	P5 Classification
CODE COMPLIANCE	AS1428.1 – 2021 (Check Floor Finish Colour for Luminance Contrast Requirements)
FIXING METHOD	Screw Fixed and/or Adhesive Fixed
APPLICATION	Surface Mounted directly to substrate with vinyl floor finish secured under front face and back lip.

HOW TO SPECIFY

Stairnosing profile Series 700, Code 717, manufactured from 6060-T5 aluminium with a 25-micron clear anodised finish and anodised alloy insert. Provide insert colour in [clear anodised / black anodised / sovereign gold anodised] as selected. Profile to achieve P5 slip-resistance classification and comply with AS 1428.1:2021, subject to verification of luminance-contrast requirements against the selected floor finish.

Install as a surface-mounted stair nosing directly to the substrate, with vinyl flooring secured beneath the front face and rear lip. Select the rebate to suit the installed vinyl plank thickness, ensuring a tight, gap-free fit. Fix using screws and/or adhesive in accordance with the manufacturer's written instructions. Provide a two-year warranty in accordance with the manufacturer's standard terms.


Distributor: Stair Nosing Australia Pty Ltd | 0422 803 365

daphne@stairnosingaustralia.com.au | stairnosingaustralia.com.au



PROFILE TYPICAL INSTALLATION

Screw Fixed

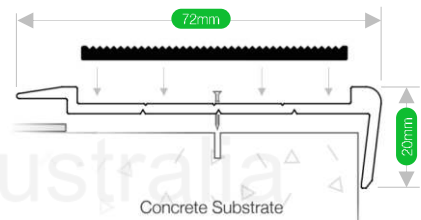

STANDARD COLOURS

Aluminium



CLEAR ANODISED

BLACK ANODISED

Insert



CLEAR ANODISED

BLACK ANODISED

GOLD ANODISED

daphne@stairnosingaustralia.com.au

[https:// stairnosingaustralia.com.au](https://stairnosingaustralia.com.au)

Mobile: 0422 803 365