STAIR NOSING AUSTRALIA

MAXIMUM QUALITY
MAXIMUM SAFETY

https:// stairnosingaustralia.com.au Contact : Daphne 0422 803 365

email: daphne@stairnosingaustralia.com.au



Recessed stair nosing is essential for protecting the edges of your steps, ensuring safety, and providing a clean finish


Designed for recessing to all hard finishes.

- 13 stair nosing, a screw-fixed aluminium profile designed to improve stair safety on hard-floor surfaces.


- Key specifications
- Material and finish: 6060-T5 aluminium alloy with a 25-micron clear anodised finish.
- Dimensions: 58 mm tread width, 10 mm front depth, and 4.8 mm tread thickness; the insert is 54 mm wide.
- Safety insert: Heavy-duty, external-grade carborundum, epoxy ribbed aluminium insert
- Slip rating: with a P5 slip rating, the highest classification stated.
- Installation and use:
  Surface-mounted and screw-fixed to hard finishes such as concrete and timber.Compliance:
- AS1428.1-2021 accessibility requirements; floor-finish colour must be checked for required luminance contrast.
- Warranty: Two years,standard warranty conditions.
- Light Reflective Value 4



Dimensions

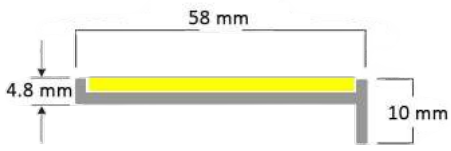

Typical installation

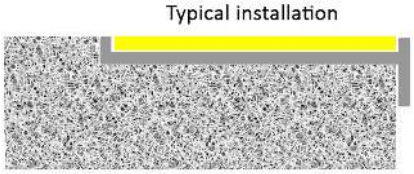

STANDARD COLOURS



CLEAR ANODISED BLACK ANODISED

Insert



CLEAR ANODISED BLACK ANODISED GOLD ANODISED