

# PRODUCT DATA SHEET STAINLESS STEEL FLAT BACK PLAIN SIDES

**web: [https:// stairnosingaustralia.com.au](https://stairnosingaustralia.com.au)**

**Contact : Daphne 0422 803 36**

**email: [daphne@stairnosingaustralia.com.au](mailto:daphne@stairnosingaustralia.com.au)**

## STAINLESS STEEL STUDS FLAT BACK PLAIN SIDES

Navigate Tactiles series are designed to be installed onto pedestrian surfaces to assist in the orientation of people who are vision impaired and to give tactile warning to safely navigate around in a built environment - detectable underfoot or by cane.

| SPECIFICATIONS     |  |
|--------------------|--|
| PRODUCT            | <b>Stainless Steel Tactile Stud</b>  |
| CODE               | <b>NSSS20</b>  |
| MATERIAL           | Solid 316 Stainless Steel  |
| TOP PROFILE        | Concentric rings, plain sides  |
| OVERALL DIMENSIONS | 35mm x 5mm   |
| PRODUCT WARRANTY   | 5 years (As per Walway's Standard Warranty)                                      |
| SLIP RATING        | R13  |
| CODE COMPLIANCE    | AS/NZS1428.4.1:2009, BCA 2014<br>(Subject to surrounding floor finish luminance) |
| FIXING METHOD      | Fixed with adhesive  |

PROFILE



A 35mm

B 5mm



Discrete Required Contrast-45%

### STANDARD COLOURS

#### Finish




STAINLESS STEEL

LRV: Dry 50.136 Wet: 41.843

### TYPICAL INSTALLATION

Fix with adhesive

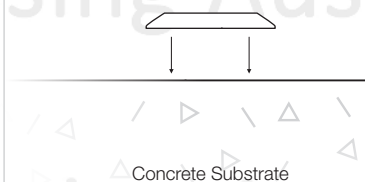

LRV [Light Reflective Values ]  
Luminance Contrast, values must be  
tested against adjacent surfaces for  
compliance with Australian Standards

