

STAIR NOSING AUSTRALIA



Profile 70 have been designed to offer lasting slip resistance. They are made from a composite material that is suitable for use in harsh environments; including, high exposure to salt water.

FRP stair nosing Profile 70 is an industrial stair nosing suitable for areas which require high non slip stair safety solutions.

FRP stair nosing such as the Profile 70 is used in commercial, industrial, mining, and the oil and gas industries.

The FRP stair tread comes in two sizes, one with a 25 mm drop/riser and one with a 10 mm drop/riser.

This means that the **10mm FRP stair Nosing** is fully compliant

with AS1428 .8 2021 Australian Standards




It is a versatile stair tread and we have installed it in residential buildings, high rise apartment stairwells, fire escapes, universities and schools.

FRP Stair Nosing 70mm x 10mm

SKU: FRP70X10
Material: FRP
Colour: Yellow/Black
Slip Rating: P5
Width: 70mm
Nose/Face: 10mm

FRP Stair Nosing 70mm x 25mm

SKU: FRP70X30
Material: FRP
Colour: Yellow/Black
Slip Rating: P5
Width: 70mm
Nose/Face: 25mm

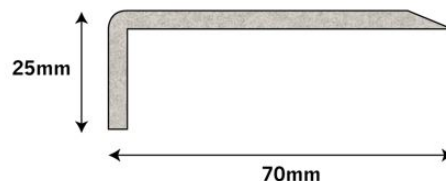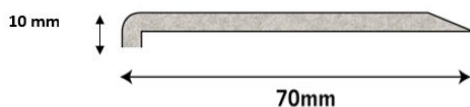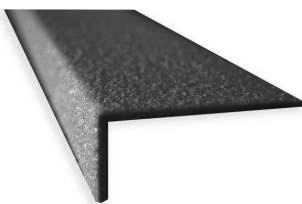

They have been slip resistance tested to AS 4586:2013 passing with the highest slip resistance rating of Class P5 for Wet Pendulum Test and Class DI for Dry Floor Friction Test - LRV values on request

Application

Profile 70 stair nosing are suitable for installation on hard surface stairs such as concrete, steel, checker plate, timber etc. they can also be installed on grated stairs.

It is important to understand that the 70 mm x 25 mm FRP stair nosing is **not compliant** with AS428 2021 standards.

The contrast colour on the tread of the step against adjacent floor finishes; whether it be black or yellow does extend down the riser by more than 10mm.